


TAKE THE LEAD.





VEHICLE APPLICATIONS

2 wheel arch sets available in each size (comes in a three metre length for each pair of wheel arches).

PRODUCT TIPS

- Use Wiss hand cutters or a sharp snap off type knife to shape ends of your flares.
- Spray with industrial lubricant before inserting the spring wire.
- Use rubber protectant or similar for the best looking finish and protection for your TJM Flex-Flares.
- When positioning screws to fasten your TJM Flex-Flares to the guard, compress the flare rather than stretch it between attachments points. This will give your flares an even, rounded and smooth finish.
- Only available in black Surface not suitable for painting.

SAFETY PRECAUTIONS

 Follow fitting instructions closely - always jack up the vehicle safely if you need to remove the wheel before starting TJM Flex-Flare installation.



35mm | TJM Flex-Flare

PN. 265RUBFL3MCAB

65mm | TJM Flex-Flare


PN. 265RUBFL3MAAB

FEATURES	BENEFITS
35mm or 65mm width choices	Suits most vehicle applications
Durable rubber construction	Resistant to cracks, splits or scratches even when bumped or scraped
Provides protection	Helps protect paint-work from road grime, stones, sand and mud thrown up by the tyres
Easy do-it-yourself fitment	Instructions shown to the right



GROOVE IN RUBBER

THIS GUIDING GROOVE SERVES AS A POINT OF REFERENCE FOR THE PLACEMENT OF SCREWS FOR EASY DIY INSTALLATION.

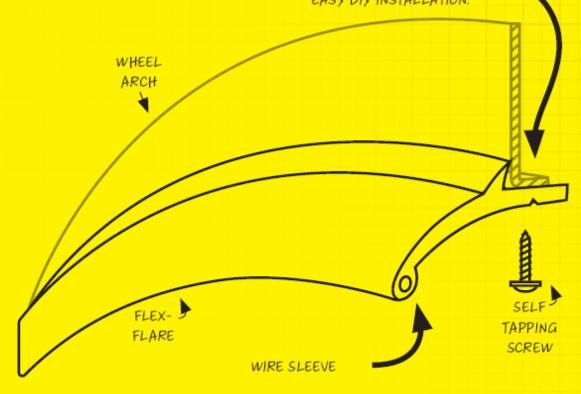

TO INCREASE THE RIGIDITY OF YOUR FLEX-FLARE (AND THE PROTECTION IT PROVIDES), A PRE-FORMED HOLE HAS BEEN EXTRUDED INTO THE SIDE OF THE FLARE, FOR EASY INSERTION OF THE PROVIDED STIFFENING WIRE.

NOTE | SPRAY WITH INDUSTRIAL LUBRICANT BEFORE INSERTING

SPECIFICATIONS	
Materials	Heavy duty flexible rubber extrusion with outer edge spring wire
Dimensions	Small - 265RUBFL3MCAB - adds 35mm extension to the vehicle
	Large - 265RUBFL3MAAB - adds 65mm extension to the vehicle
Weight	2 Wheel Arch: Small - 2.1kg
	2 Wheel Arch: Large - 2.5kg

Warranty

5 Year Warranty

R22.01.04

