



TAKE THE LEAD.







CARE & SAFETY INSTRUCTIONS



Avoid storing wheel bag in direct sunlight, or wet or humid conditions



Clean the wheel bag regularly with light soapy water




Allow the wheel bag to dry before storing



Do not store hot or sharp objects or hazardous chemicals in wheel bag

FITTING GUIDE

- Prior to using the wheel bag, ensure license plate is not obstructed and the wheel is properly secured to the vehicle.
- 2. Drape the wheel bag over the wheel.
- 3. Grab the two (2) equal length straps.
- Lay straps in a vertical or in a cross patten behind the wheel & secure to the buckles on bottom of the wheel bag (refer to diagram).
- Pull both ends of the straps to tighten the bag against the wheel, making sure the straps are not twisted and that the buckles are sitting against the wheel.
- Lay the remaining strap in a U shape pattern under the centre wheel mount bracket, or feed the strap through the rims (where possible) and secure to the top buckle.
- Pull the end of the strap to tighten against the wheel, ensure the straps are not twisted and buckles are sitting against the wheel.
- Tie and secure any excess straps, to prevent them from flapping or dragging.
- Check again to ensure license plate is not obstructed.

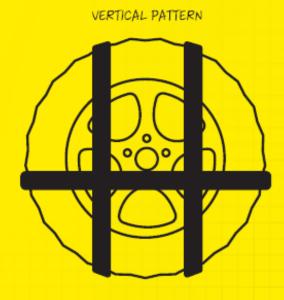

CROSS PATTERN






Inspect the rear wheel bag before each use for damage, wear & tear. Do not use if damaged.




SECURITY

A locking strap has been designed into rear wheel bag to allow for rear wheel bag to be secured to prevent theft, There are two ways to use this feature:

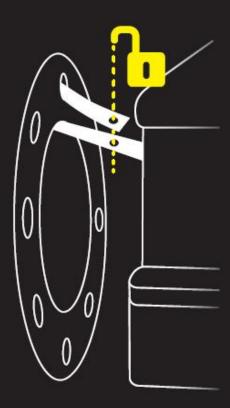



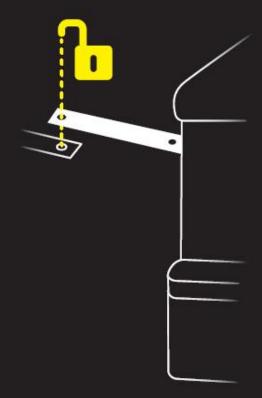

Secure the strap with a lock through one of the eyelets, attaching it to a suitable location on the rim or other part of the vehicle.

Distributed by **TJM Products Pty Ltd**

17 Johnstone Road Brendale Australia 4500

Tel. (07) 3865 9999 Fax. (07) 3865 3677







