

# EXPLORA

WHERE WILL  
YOU EXPLORA?



22" DOUBLE ROW 36 L.E.Ds



22" SINGLE ROW 18 L.E.Ds



14" SINGLE ROW 12 L.E.Ds



Visit  
[narva.com.au/explorabars](http://narva.com.au/explorabars)

## SUPERIOR CONSTRUCTION

- One piece die cast aluminium housing designed without end caps provides optimum sealing and heat dissipation
- Virtually unbreakable hard coated polycarbonate lens
- Stainless steel brackets and mounting hardware (SUS 304)
- Fully sealed and submersible (IP68 & IP69K)
- Integrated Genuine Nitto Breather Vent
- Pre-wired weatherproof DT connector



Nitto Breather Vent



Stainless Steel Brackets

## OPTIONAL ACCESSORIES

### BULL BAR TUBE MOUNT BRACKETS

- Available in 3 sizes for single row or double row light bars
- Allows fitment onto most tubular style nudge bars and bull bars


Single - 2"/50.8mm Diameter	PART NO. 72293
Single - 2.5"/63.5mm Diameter	PART NO. 72294
Single - 3"/76.2mm Diameter	PART NO. 72295
Double - 2"/50.8mm Diameter	PART NO. 72296
Double - 2.5"/63.5mm Diameter	PART NO. 72297
Double - 3"/76.2mm Diameter	PART NO. 72298



### 350MM LICENSE PLATE BRACKET


PART NO. 72292

- Allows fitment of 14" light bar without requiring a nudge bar or bull bar
- No drill holes required
- Lightweight aluminium
- Durable powder coated finish
- Suits standard Australian, New Zealand & European licence plates

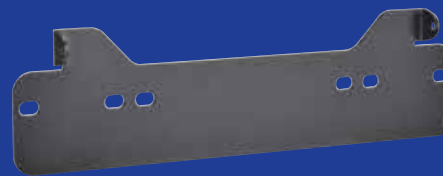


### WIRING HARNESS PART NO. 74401

- Contains everything required for an easy and professional connection
- Ensure light bars perform to their maximum capacity

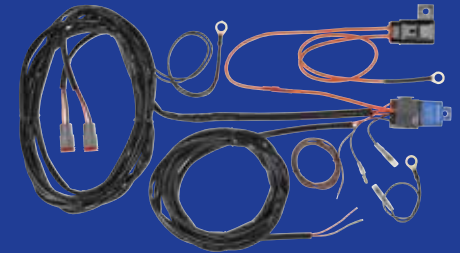


### 14" SINGLE ROW L.E.D LIGHT BAR WITH LICENSE PLATE BRACKET


PART NO. 72273

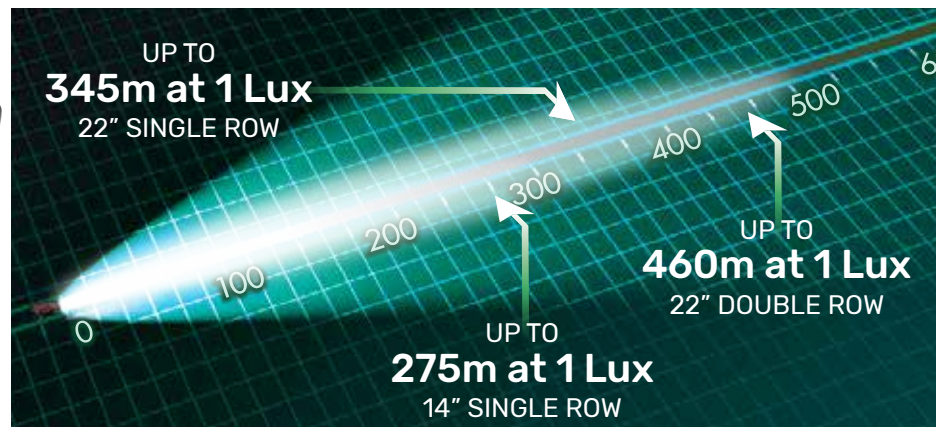

EXPLORA L.E.D LIGHT BAR BEAM PATTERNS

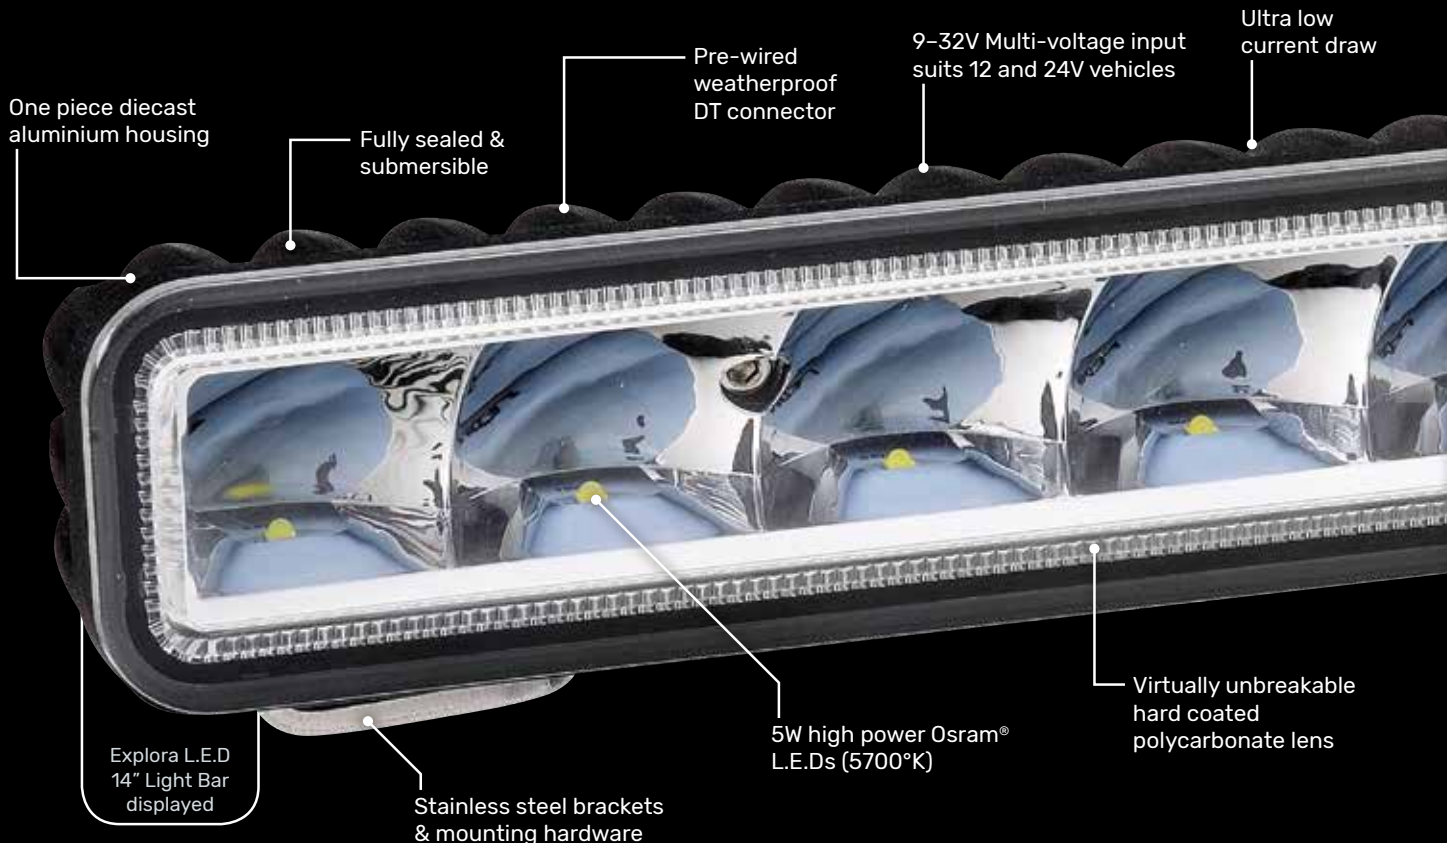

## SPECIFICATIONS

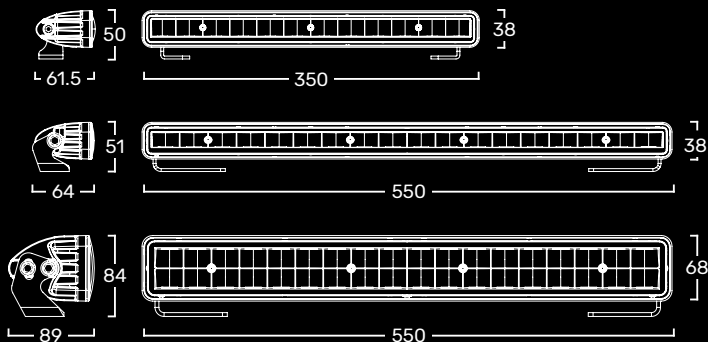

Dimensions are measured in mm with 2 'L' mounting brackets.

<b>INPUT VOLTAGE RANGE</b>	9-32V
<b>L.E.D TYPE:</b>	5 Watt Osram® DURIS-P8 L.E.Ds
<b>OPERATING TEMP:</b>	-30°C to 65°C
<b>COLOUR TEMP:</b>	5700°K
<b>HEAT MANAGEMENT:</b>	Active Thermal Management System (ATMS)
<b>EMC:</b>	ECE R10
<b>IP RATING:</b>	IP68 & IP69K

	<b>14" SINGLE</b> PART NO. 72272	<b>22" SINGLE</b> PART NO. 72274	<b>22" DOUBLE</b> PART NO. 72282
<b>CURRENT DRAW</b>	2.6A at 12V 1.3A at 24V	3.7A at 12V 1.9A at 24V	6.6A at 12V 3.0A at 24V
<b>L.E.D POWER:</b>	60 Watts	90 Watts	180 Watts
<b>LUMENS:</b>	6,000 raw 2,377 effective	9,000 raw 3,589 effective	18,000 raw 6,217 effective
<b>WEIGHT:</b>	650g	1100g	2420g