


RECOVERY TRACK HOLDER KIT INSTRUCTIONS

FIRST TIME INSTALLATION

- Please read instructions carefully before installation.
- Check the contents of kit. Contact your dealer if any parts appear to be missing or damaged.
- Clean your roof racks or platform prior to fitting the brackets.

NOTE - THIS PRODUCT IS OPTIMISED TO WORK WITH THE FOLLOWING RECOVERY TRACKS:


- MAXTRAX MKII
- TRED 1100mm & 800mm



- For LockN'Load, Whispbar HD, Prorack HD, and other heavy duty bars, follow Steps 1A, 2A, 3 - 5, 6 - 8
- For LockN'Load Platform, follow Steps 1B, 2B, 3 - 5, 6 - 8
- To mount direct to LockN'Load Platform or LockN'Load/Whispbar/Prorack HD, and other heavy duty bars, follow Steps 1C - 3C, 6 - 8

KIT CONTENTS


| Item | Component | Qty |
|------|------------------------------|-----|
| 1 | Mounting Bracket | 2 |
| 2 | Baseplate | 2 |
| 3 | M8 Spring Nut | 6 |
| 4 | M8 Socket Head Capscrew 25mm | 8 |
| 5 | M8 Spring Washer | 6 |
| 6 | M8 Washer | 8 |
| 7 | M8 Nylock Nut | 2 |
| 8 | M8 Slot Nut | 4 |
| 9 | M8 Hex Set Screw 16mm | 2 |
| 10 | M8 Hex Set Screw 25mm | 2 |
| 11 | M8 Socket Head Capscrew | 4 |
| 12 | Fixed Strap | 2 |
| 13 | Adjuster Strap | 2 |
| 14 | Security Cable | 1 |
| 15 | Allen Key | 1 |

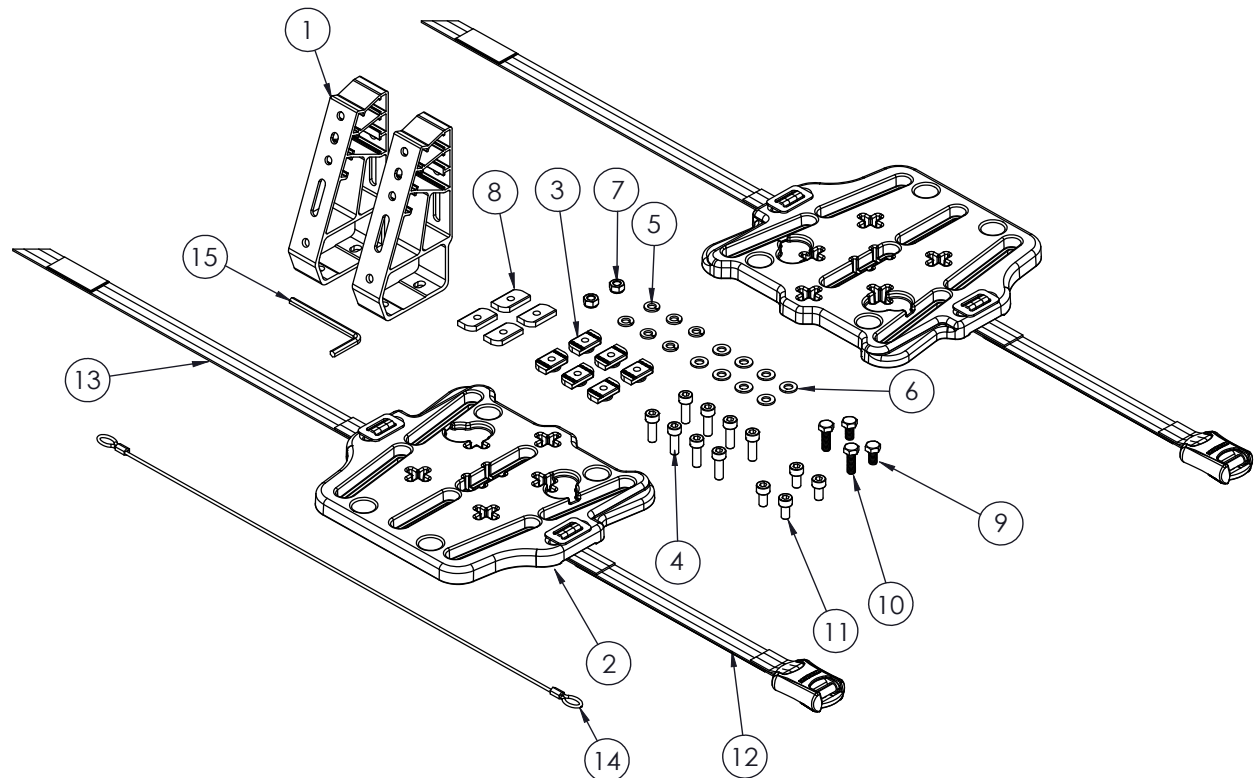


INSTALLATION USING BRACKETS TO LOCKN'LOAD, WHISPBAR HD, PRORACK HD, AND OTHER HEAVY DUTY CROSSBARS

1A Insert 2 x M8 Spring Nuts at an equal distance from the ends of each crossbar. Push Spring Nuts down into the crossbar channels and twist to lock into place as pictured.

Use the Mounting Bracket to ensure Spring Nuts align with holes in the base of Mounting Bracket.

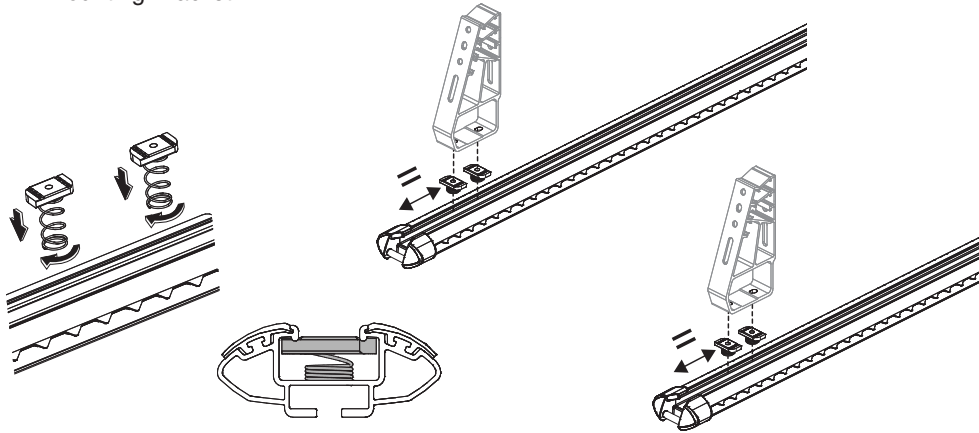

2A Secure the 2 x Mounting Brackets to the M8 Spring Nuts in the crossbars. Tighten to 4Nm with 6mm Allen Key provided or a suitable Torque Wrench.

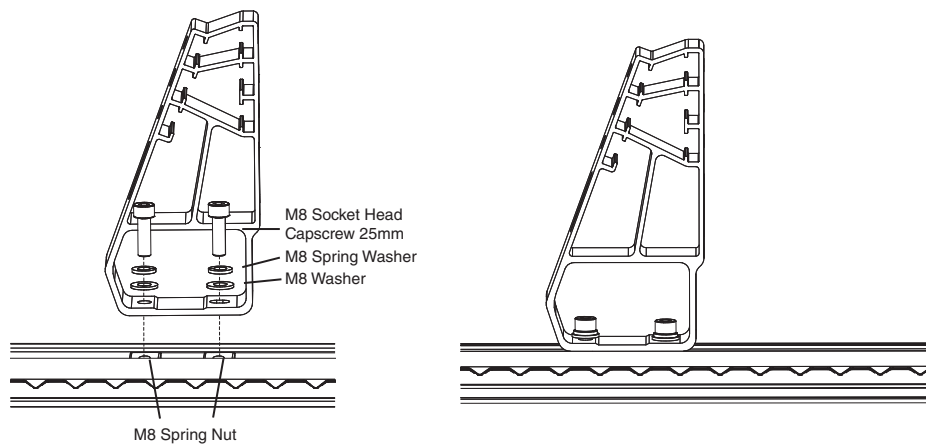


To install Baseplates, proceed to Step 3 / Page 3


INSTALLATION USING BRACKETS TO LOCKN'LOAD PLATFORM

1B Insert 4 x M8 Spring Nuts into the cut outs of the Platform slats with three slats in between as shown. Push Spring Nuts down into slat channel and twist to lock into place.

Use the Mounting Brackets to ensure Spring Nuts align with holes in the base of Mounting Bracket. Ensure nuts are equally spaced as shown. The provided 6mm Allen Key can be used to assist nut movement along channel.

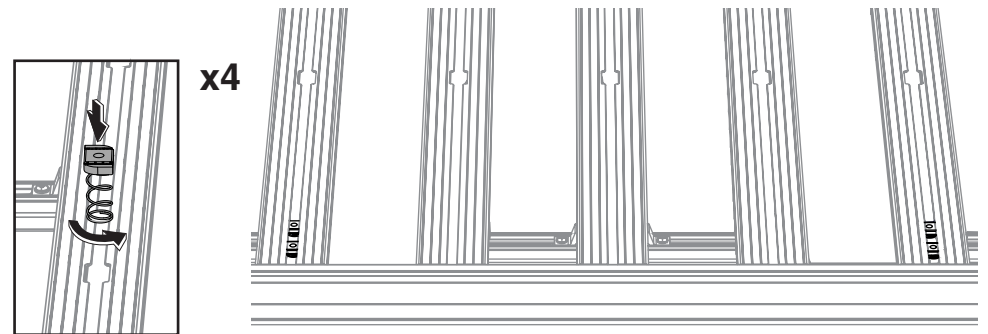

2B Secure the 2 x Mounting Brackets to the M8 Spring Nuts in the Platform slats. Tighten to 4Nm with 6mm Allen Key provided or a suitable Torque Wrench.

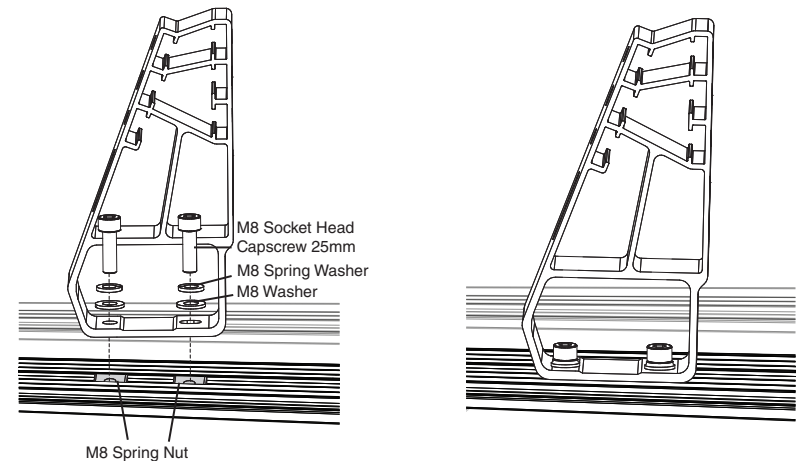


To install Baseplates, proceed to Step 3 / Page 3

3 Slide 1 x M8 Slot Nut into the top channel of each Mounting Bracket.

Loosely attach the Baseplates to the Mounting Brackets, with the narrow ends pointing towards to front and rear of the vehicle.

The middle Baseplate channels must align with the M8 slot Nuts in the Mounting Brackets.


Check that the centre channels are horizontal and in alignment.

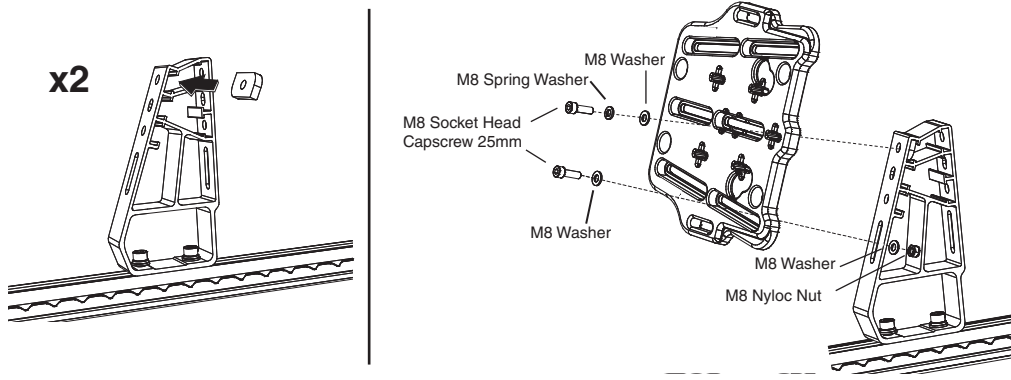


4 Set the distance between the inside of the Baseplates according to your Recovery Track type:

| Recovery Track Type | Distance between Baseplates |
|---------------------|-----------------------------|
| MAXTRAX Mkii | 440mm |
| TRED 800 | 235mm |
| TRED 1100 | 440mm |
| TRED PRO* | Approx 440mm |

* TRED PRO tracks do not directly interface with the recesses in the baseplates. Instead, set distance between baseplates so that straps shown in Step 5 sit in the carry handle recesses of the TRED PROs.

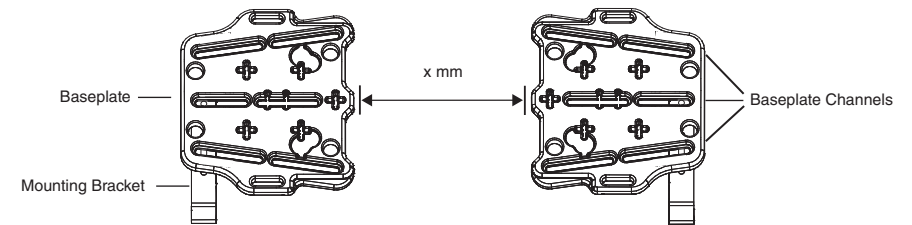

5 Tighten all bolts to 4Nm with 6mm Allen key provided or a suitable Torque Wrench, and a 13mm spanner as required.

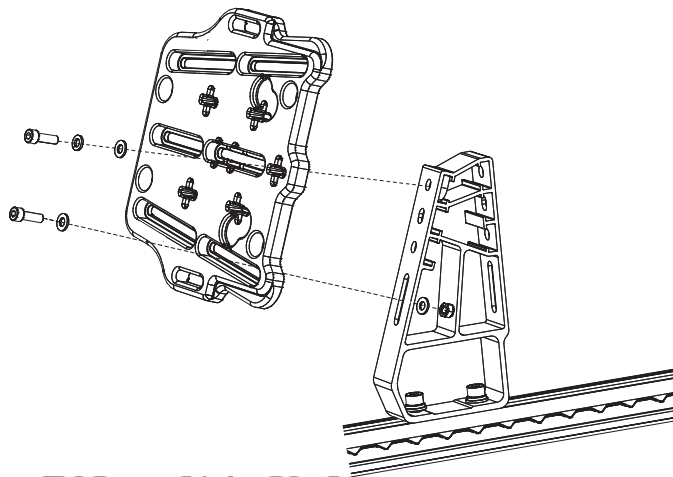


To mount Recovery Tracks, proceed to Step 6 (Page 5)

INSTALLATION FLAT ONTO LOCKN'LOAD PLATFORM OR WHISPBAR HD, PRORACK HD, AND OTHER HEAVY DUTY BARS

1C Check crossbar spread is between 492mm to 892mm.


Position Baseplates on to separate crossbars or Platform slats, with the narrow ends pointing towards the front and rear of the vehicle. Set the distance between the inside of the Baseplates according to your Recovery Track type:

| Recovery Track Type | Distance between Baseplates |
|---------------------|-----------------------------|
| MAXTRAX Mkii | 440mm |
| TRED 800 | 235mm |
| TRED 1100 | 440mm |
| TRED PRO | Approx 440mm |

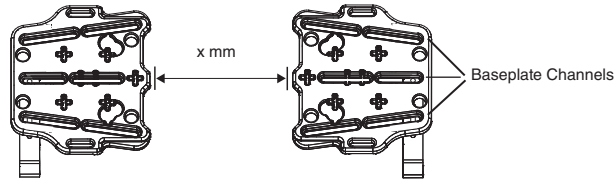


2C Insert 3 x M8 Spring Nuts in each crossbar channel in the positions under the Baseplate channels noted in the previous step. Push Spring Nuts down and twist to lock into place as pictured.

Note - Your crossbar spacing and track size will determine where in the Baseplate channels to secure to the crossbars to obtain the recommended distance.

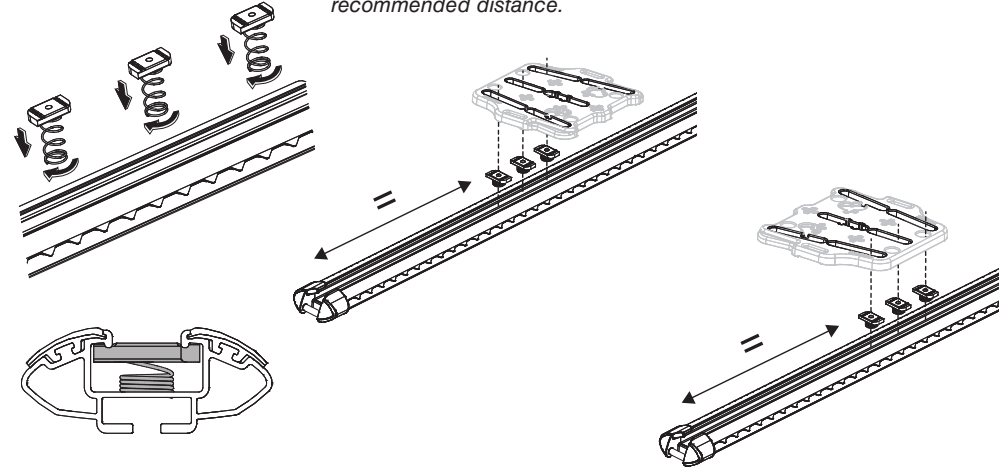

3C Loosely fit 2 x Baseplates to the M8 Spring Nuts in the Crossbars. Recheck the measurements between the insides of the Baseplates from step 1C and ensure centre Baseplate channels align.

Tighten screws to 4Nm with 6mm Allen Key provided or a suitable Torque Wrench.

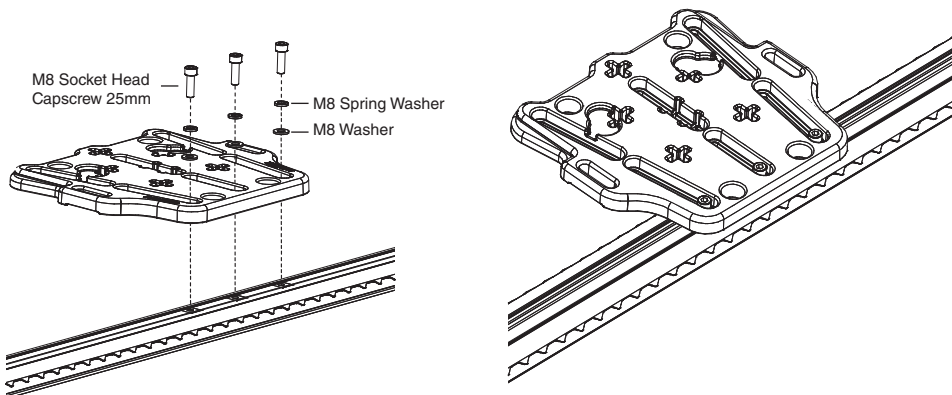


To mount Recovery Tracks, proceed to Step 6 (Page 5)


MOUNTING RECOVERY TRACKS

- 6** Attach Straps by hooking the webbing buckles from behind and then through the outer holes on the Baseplates. Ensure that the buckles are sitting flat, as pictured. Also, check that the velcro on the Adjuster Strap is facing away from the vehicle, and that the velcro on the Fixed Strap is facing towards the vehicle.

For installations using the brackets, it is recommended that the Fixed Strap assemblies be installed in the top position on both Baseplates.

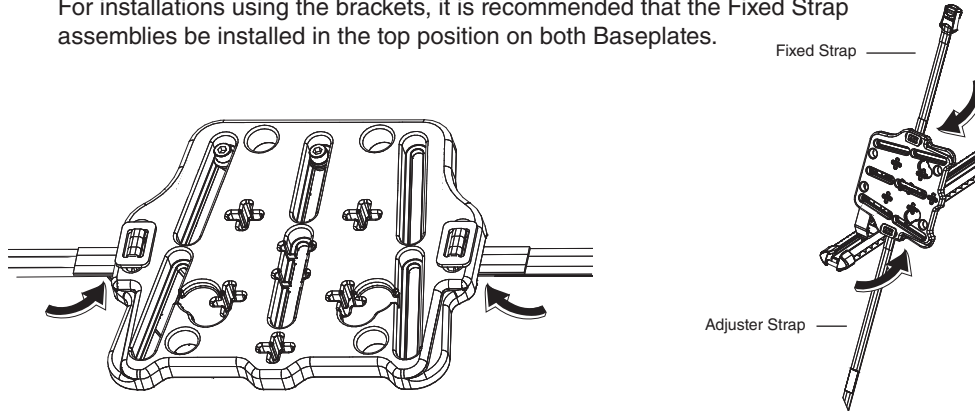


- 7** Loosely fit Adjuster strap through the cam buckle in the Fixed Strap assembly prior to fitting recovery tracks. Insert recovery tracks through the loose Straps. Locate the crosshairs on your recovery tracks into the corresponding cross slots in the Baseplates. Tighten Straps firmly and secure the velcro sections.

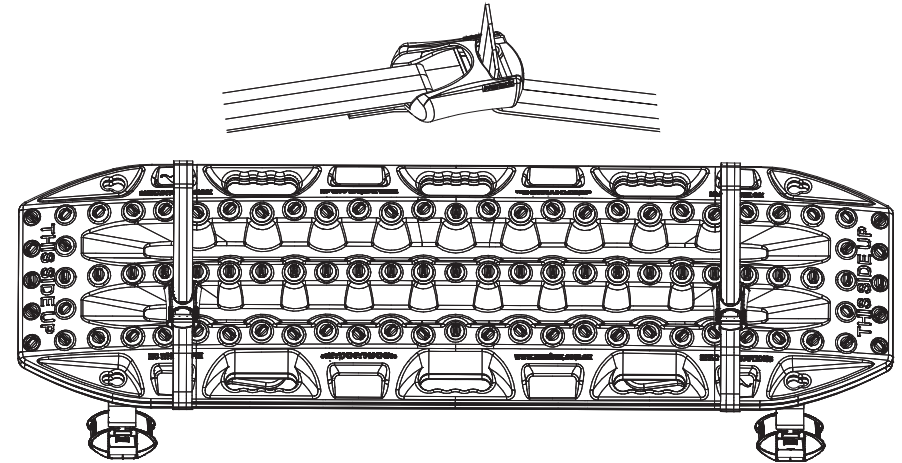

LOCKING OPTION

- 8** To keep your Recovery Tracks safe and secure use the Security Cable to loop around the inside of Crossbar leg and feed through a keyhole on Recovery Tracks. Secure with padlock (not provided).

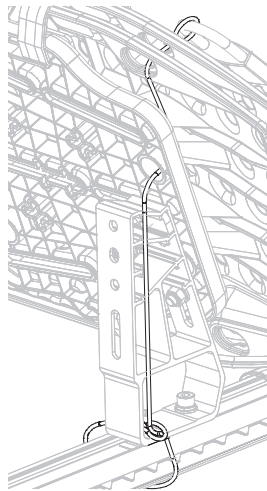

MAINTENANCE

- Check accessory is securely attached whenever you refit it to the vehicle. If the unit feels loose, refer to the fitting instructions and readjust.
- Regularly check all fasteners. This includes all attached accessories and roof racks.
- Remove Straps when not in use.
- Clean with hot soapy water and sponge as required.

CAUTION

- The Mounting Brackets can carry up to 25kg of equipment per pair. Ensure all items are securely attached.
- Ensure that all loads are distributed evenly across the roof racks and are fastened securely.
- A loaded roof rack system can alter the performance of your vehicle. Be especially aware of the effects of side winds, changing of direction, and braking performance. Avoid rapid acceleration and deceleration. Drive Carefully.
- Make sure all loads are securely fastened with non-elastic Straps. Check regularly during longer journeys.
- Never drive into a car wash with the roof rack system or accessories fitted.
- Do not exceed the vehicle manufacturer's roof load rating. Total load equals weight of roof racks + accessories + cargo/equipment.

WARRANTY & DISCLAIMER

Yakima Australia Pty Ltd ABN 58 154 440 221

17 Hinkler Court, Brendale QLD 4500

Tel: 0800 4776 722 (NZ) or 1800 143 548 (AU)

Email: warranty@yakima.co.nz or warranty@yakima.com.au

1. Where the product is supplied to the customer for other than business purposes within the meaning of section 43 of the New Zealand Consumer Guarantees Act 1993, the provisions of that Act shall apply. It is important that anyone who fits or uses this product does so in accordance with the manufacturer's instructions.
2. Where the product is supplied to the customer for business purposes within the meaning of section 43 of the New Zealand Consumer Guarantees Act 1993, the provisions of that Act and all other representations or terms (including any conditions or warranty expressed or implied by law, statute or otherwise) not expressly included in this leaflet are hereby expressly excluded shall have no effect and the clauses (a) and (b) shall apply.
3. Subject to the **Additional Information (Australia)**, where the product is supplied and purchased in Australia, the following shall apply:
 - (a). THE SUPPLIER WARRANTS the product to be free from defects in materials and/or workmanship for a period of three (3) years from the date of original purchase (the warranty period). Proof of purchase is required. Subject to the limitations and exclusions set out below, the Supplier hereby agrees to remedy any defects in materials or workmanship becoming apparent during the warranty period, by replacing or repairing any defective product or component (at its option) free of charge to the purchaser in respect of replacement parts or labour. Any defective product or component must be notified and where practicable, returned at the purchaser's expense to the Supplier immediately upon discovery of the alleged defect and no attempt made on the part of the purchaser to repair it.

- (b). EXCEPTIONS, EXCLUSIONS AND LIMITATIONS TO WARRANTY. The product and/or its components must be fitted/assembled and loaded in accordance with the Supplier's written instructions and any requirements set out in the car's owner manual. This warranty does not cover defects, loss or damage resulting from circumstances beyond the Supplier's control including, but not limited to misuse, overloading, or failure to assemble and/or fit the product or component in accordance with the Supplier's written instructions. Nor does the warranty cover defects, loss or damage resulting from accidents, unlawful use of the vehicle or defects/inconsistencies in the vehicle on which the product or component is fitted. Liability for direct, indirect, special, punitive, incidental, exemplary, contractual or consequential damage or loss arising from defects, faulty materials or design omissions or negligence or workmanship in the product or its components is hereby expressly excluded subject to the following. Certain Commonwealth legislation, including the Competition and Consumer Act 2010 (Cth), and other State and Territorial legislation confers upon purchasers rights which cannot be excluded from or be restricted or modified by contract. Any conditions, guarantees and/or warranties implied by law and incapable of exclusion are deemed to be expressly incorporated herein. Nothing herein contained is intended nor shall be permitted to be inconsistent with any such conditions, guarantees and/or warranties. To the extent permitted by legislation all conditions, guarantees and/or warranties such as implied warranties which are capable of exclusion are hereby expressly excluded and negated.

ADDITIONAL INFORMATION (AUSTRALIA)

This information should be read in conjunction with clauses (a) and (b).

IMPORTANT LEGAL NOTICE

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

This warranty does not change or take away your rights under the Australian Consumer Law. Your right to claim under this policy for the benefits covered is in addition to other rights and remedies you have under the law in relation to the product.

Where you become aware of defects in materials or of workmanship, and wish to make a claim under this warranty you must do the following for the warranty to be honoured by your Prorack dealer or Yakima Australia Pty Ltd ABN 58 154 440 221 (Yakima):

1. Make a claim as soon as practicable by contacting the Prorack dealer from whom you purchased the product, who will give you instructions on how to proceed.
2. If you are unable to contact the Prorack dealer, or the dealer is not able to remedy the defect, you should contact Yakima as soon as practicable at:

Call: 0800 4776 722 (NZ) or 1800 143 548 (AU)

Email: warranty@yakima.co.nz or warranty@yakima.com.au

Alternately, you can write to Yakima at 17 Hinkler Court, Brendale QLD Australia 4500 in order to make a claim under your warranty.

3. Upon contacting Yakima directly, you should explain as fully as possible the defect. A Yakima representative will provide you with appropriate instructions for returning the product together with a copy of the original purchase invoice or receipt to Yakima.
4. The costs and expenses associated with making a claim under your warranty including the costs of complying with those instructions and of returning the product to Yakima or the Prorack dealer will be borne by you.

Following receipt of the product and purchase invoice or receipt, Yakima or the Prorack dealer must inspect the product to determine whether the claim falls within the warranty. If:

- 4.1 the claim falls within the warranty, Yakima will remedy any defects in materials or workmanship becoming apparent during the warranty period, by replacing or repairing any defective product or component (at its option) free of charge to the purchaser in respect of replacement parts or labour.
- 4.2 the claim does not fall within the warranty, Yakima will return the product to you at your expense.