

IMPORTANT - PLEASE READ BEFORE INSTALLATION

- Once mounted on glass, this antenna is rugged and durable
- Extra care is to be taken when handling this antenna before and during installation
- Do not flex excessively during removal of backing paper and white tab
- Take care in planning the position of your antenna, once mounted the antenna cannot be removed without damage
- Check state laws regarding any visibility issues with mounting on the rear window
- This antenna is not compatible on windscreens with any aftermarket tinting with metallic film


PLEASE NOTE: THIS ANTENNA WILL NOT FUNCTION CORRECTLY UNLESS IT IS MOUNTED ONTO A GLASS SURFACE

INSTALLATION PROCEDURE



Follow the instructions carefully as once the antenna is installed it cannot be removed without damaging it

- This antenna is designed to be installed on the inside of the windscreen
- Due to its size, mounting on the rear windscreen is ideal. Demister lines found on the glass will not affect the performance of the antenna
- Position the socket (on the antenna) adjacent to the windscreen edge (Do not remove the paper backing yet)
- Once you have determined the best position for the antenna fit the cable in its position. Do not apply the antenna to the window until the cable is routed in the windscreen trim. It must be routed from the selected windscreen position to the radio
- If mounted on the side of the window a minimum clearance of 150mm is required from the edge as shown below
- Clean the windscreen with the supplied alcohol wipe
- Before permanently fixing the antenna to windscreen, connect the antenna to the cable. Place on a hard surface and press together until you can feel it click into place
- Remove the adhesive backing paper from the transparent antenna and the white double-sided tape
- Gently attach the white adhesive tape to the glass first to allow for minor alignment and then attach the antenna to the glass. Be mindful in removing any air bubbles
- The connector can be swivelled in the direction of the cable run
- Removing the antenna after it has been mounted can result in damage to the antenna

Front or Rear Windscreen

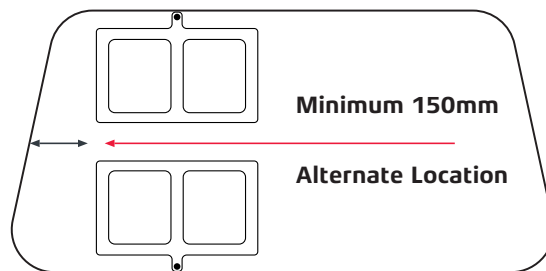

Passenger Side

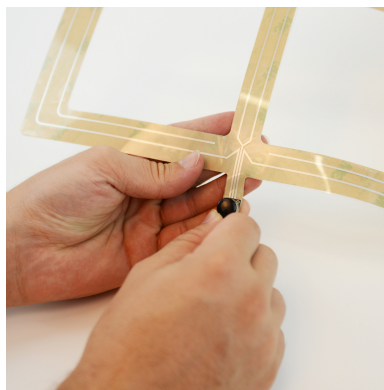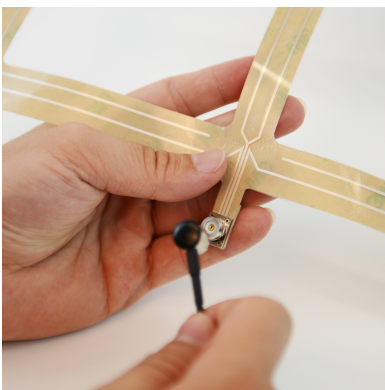

gme.net.au

Standard Communications Pty Ltd trading as GME.

P/N: 310700 D/N: 51019-1